


## "SZK" 19" air conditioning Cabinets

### DESCRIPTION:

- IP65 protection and mechanical resistance IK10 ratings confirmed by the test report no. B / 2016/233
- The housing walls have a 30mm expansion gap (double walls),
- A polyurethane gasket is poured on the door,
- Lockable with a 3-point bolt lock with a padlock bolt, swing handle,
- 2 pairs of 19" rack - adjustable distance between the front and rear pair from 290mm do 420mm, distance between the front of the body and the first pair of racks from 55mm do 125mm,
- 640W air conditioner (Voltage: 230 V),
- 3U voltage distribution panel,
- a heating set consisting of a CSL028 250W semiconductor blower controlled by an electronic hygrotherapy ETF 012,
- additional fans controlled by a thermostat mounted in the roof,

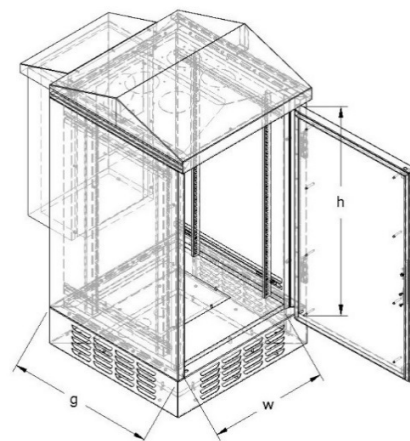

On request, cabinet can be made from Aluminum.

### Additional equipment:

- PS 19" 1U SC SX / DX extendable,
- PS 19" 2U SC DX pull-out,

Symbol	External dimmensions (mm)			Internal dimmensions (mm)		
	height	width	depth	height (h)	width (w)	depth (g)
SZK 18U 19" z klimatyzatorem*	1160	610	860	800	480	508
SZK 30U 19" z klimatyzatorem*	1700	610	860	1335	480	508



**SZK-18U z klimatyzatorem**